

STERYKLEAR KSP-KST

- Integrity Testable in situ
- High effective filtering area with SE-TECH technology
- Repeatedly steamable in situ and in autoclave
- Sanitizable
- Thermowelded construction
- EC-listed materials for Food contact
- FDA-listed materials per CFR21
- Bio-Safety per USP-Plastics



STERYKLEAR KSP and KST filter elements adopt SE-TECH technology which allows to achieve better filtration results from the membranes; the design optimises the flow distribution between the filter media and the internal core to avoid restrictions and to exploit the full area of the cartridge to generate higher throughput and increase service life.

STERYKLEAR KSP and KST are utilized as final sterilizing filters in pharmaceutical and food & beverage general application; PH-grade, prefluxed with non-pyrogenic water and with certification of quality (with serial number) is used in critical applications. Manufacturing is completed in a controlled environment; secure testing during the manufacturing process assures standards of high quality.

MATERIALS OF CONSTRUCTION

Filter media	Asymmetric PES membrane
Support KSP	polypropylene
Support KST	polyester
Internal Core	polypropylene
External Cage	polypropylene
End caps / Adapters	polypropylene

FOOD-SAFETY

STERYKLEAR KSP-KST filter elements meet European Directives 82/711/ECC, 85/572/ECC, 89/109/ECC, 93/8/ECC, 97/48/EC, 2001/61/EC, 2002/16/EC, 2002/72/EC and 2004/19/EC for food contact use and global migration.

BIO-SAFETY

Filter media and components pass USP Biological Reactivity and Chemical-Physical tests for CLASS VI plastics. Specific for "PH" grade: the filter meets USP "Water for injection" requirements for particle release and the effluent is Non-Pyrogenic per USP Bacterial Endotoxins (< 0,25 EU/ml).

QUALITY STANDARDS

Produced under a certified Quality System to guarantee traceability of manufacturing records and integrity testing results.



OPERATING CONDITIONS

- max. continuous temperature	80 °C
- max. cumulative time of steam sterilization	20 hours at 125 °C or 40 hours at 121° C with cycles of 30 minutes
- sanitization with hot water	80 °C max
- sanitization with chemicals	can be sanitized by standard chemical agents
- max. differential pressure	5,0 bar at 25 °C
- recommended change out differential pressure	2,0 bar at 25 °C
- recommended rinse up volume	3 liters/ 10" cartridge

CODE	ABSOLUTE FILTRATION RATING IN LIQUIDS	BACTERIAL RETENTION >10 ¹⁰ CFU/ 10" CARTRIDGE *	ACCEPTABLE LIMIT FOR DIFFUSION TEST WITH WATER FOR 10" CARTRIDGE (ml/min)
FY	0,2 µm	Brevundimonas diminuta	≤ 26 @ 2,7 bar
FT	0,45 µm	Serratia marcescens	≤ 16 @ 1,7 bar
FK	0,65 µm	Leuconostoc oenos	≤ 25 @ 1,1 bar

*as per ASTM F838-83 edition 1993

WATER FLOW RATE FOR 10" CARTRIDGE

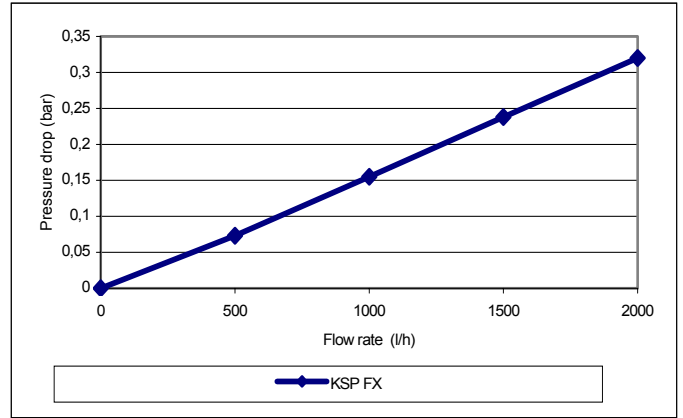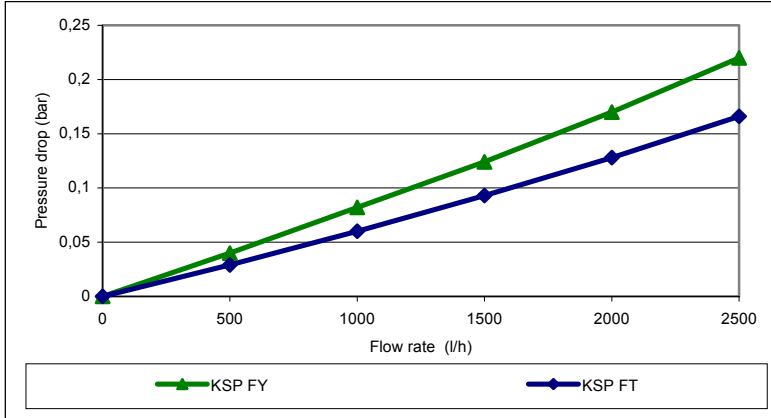

STERYKLEAR KSP/KST ORDERING INFORMATION

KS P - 207 1 - FY - BG - SB -

MATERIALS SUPPORTS UPSTREAM AND DOWNSTREAM	CODE	ABSOLUTE FILTRATION RATING micron	CODE	CODE	GASKETS
Polypropylene	P	0,2	FY	No code	Standard
Polyester	T	0,45	FT	E	On request
		0,65	FK	V	On request
					Silicone
					EPDM
					VITON

END FITTING	CODE	CODE	NOMINAL LENGTH	CODE	PACKING TYPE
SOE: open end with (2) O-Ring 2.222. Blind end with flat top.	203	1	10"	SB	Single box
SOE: open end with (2) O-Ring 2.226 and 2 bayonet locks. Blind end with fin.	207	2	20"	MB	Multiple box
SOE: open end with (2) O-Ring 2.222. Blind end with fin.	208	3	30"		
SOE: open end with (2) O-Ring 2.222 and 3 bayonet locks. Blind end with fin.	212	4	40"		

CODE	PRODUCT GRADE
BG	Biological Grade; tested and prefluxed.
BQ	Biological Grade; tested and prefluxed. Quality Certification in the box.
PH	Biological Grade; tested and prefluxed with Non-pyrogenic water. Quality Certification, with serial number, in the box.

DS-KSP/KST-562-UK-05-4

Data contained in this bulletin are informative and subject to change without notice. User is responsible for determining whether the product is fit for particular purpose and suitable for User's method of application.



Bea Technologies Spa Via Newton, 4 - 20016 Pero (Milano) ITALY
 Tel +39 02 339271 FAX +39 02 3390713 e-mail: info@bea-italy.com
 web: www.bea-italy.com