## ASME / CE Filter Housing High Purity Multi-Round Series



The High Purity ASME/ CE Cartridge housings are designed to meet your critical processing needs. These housings are commonly used in the Industrial, Pharmaceutical, Food and Beverage Industries. These housings are ideal using only superior grade 316L or 304L stainless steel.

The housings are available in 222, 226 o-ring style and DOE. A complete line of housings from 3 to 53 round and in sizes from 10 to 40 inches are available to meet the needs of your critical applications. The design of the housing provides a positive seal with swing bolt closure.

Secure swing bolt closure design. Custom options are available and include: handles, lifting davit upstream and downstream drains and choice of inlet/outlet connection sizes.

Top entry with swing bolt closure., Offset or other configuration are available. ASME U or UM Stamp, CE option available.

Applications	
Process Water	Food & Beverage
Pharmaceutical	Sterile Air
Fine Chemicals	Electronics



#### **Materials of Construction**

Head: 316L/304L Stainless Steel
Bowl: 316L/304L Stainless Steel
Center Post with Seal plate: 316L/304L SS
Vent/ Drain Plug: 316L/304 Stainless Steel
O-Rings: Viton, EPDM, Buna, TEV,

Silicone on request

#### **Dimensions (nominal)**

Lengths (in): 10, 20, 30 and 40

### **Connections**

Inlet/ Outlet: Flange Vent / Drain: NPT

#### **Finish**

Exterior & Interior Finish: EP, BB

## **Operating Conditions**


Max operating pressure: 150 psi @ 250F

Features	Benefits
■ Industrial Design	<ul> <li>Offset or T-Style Choice</li> <li>Fully Self draining</li> <li>No Dead Legs</li> </ul>
■ Low Hold Volume	■ Maximize Product Recovery
■ Easy to use low point drain valve	■ Ease of filter change-out

# ASME / CE Filter Housing High Purity Multi-Round Series



#### INDUSTRIAL OFFSET

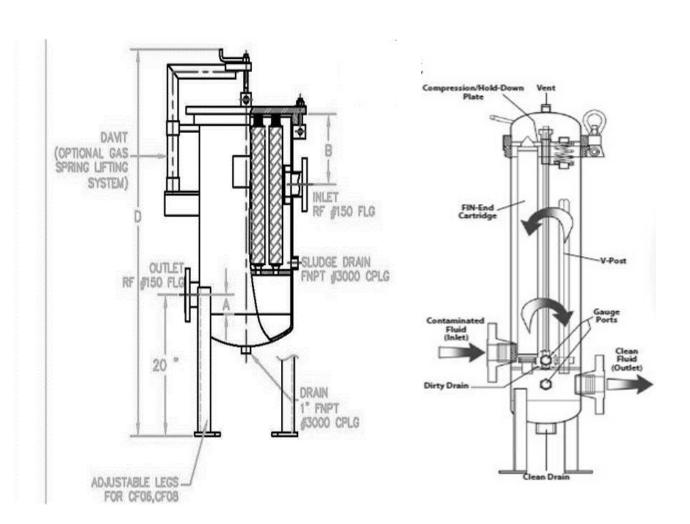

**Your Local Distributor:** 

#### Please Visit Us At:

www.pharmbiologicsolutions.com

Email:info@pharmbiologicsolutions.com

317-415-0179 phone 317-536-3937-fax